






For more information, use your smartphone's QR reader to find out more about the Sooner Ranch lineup.

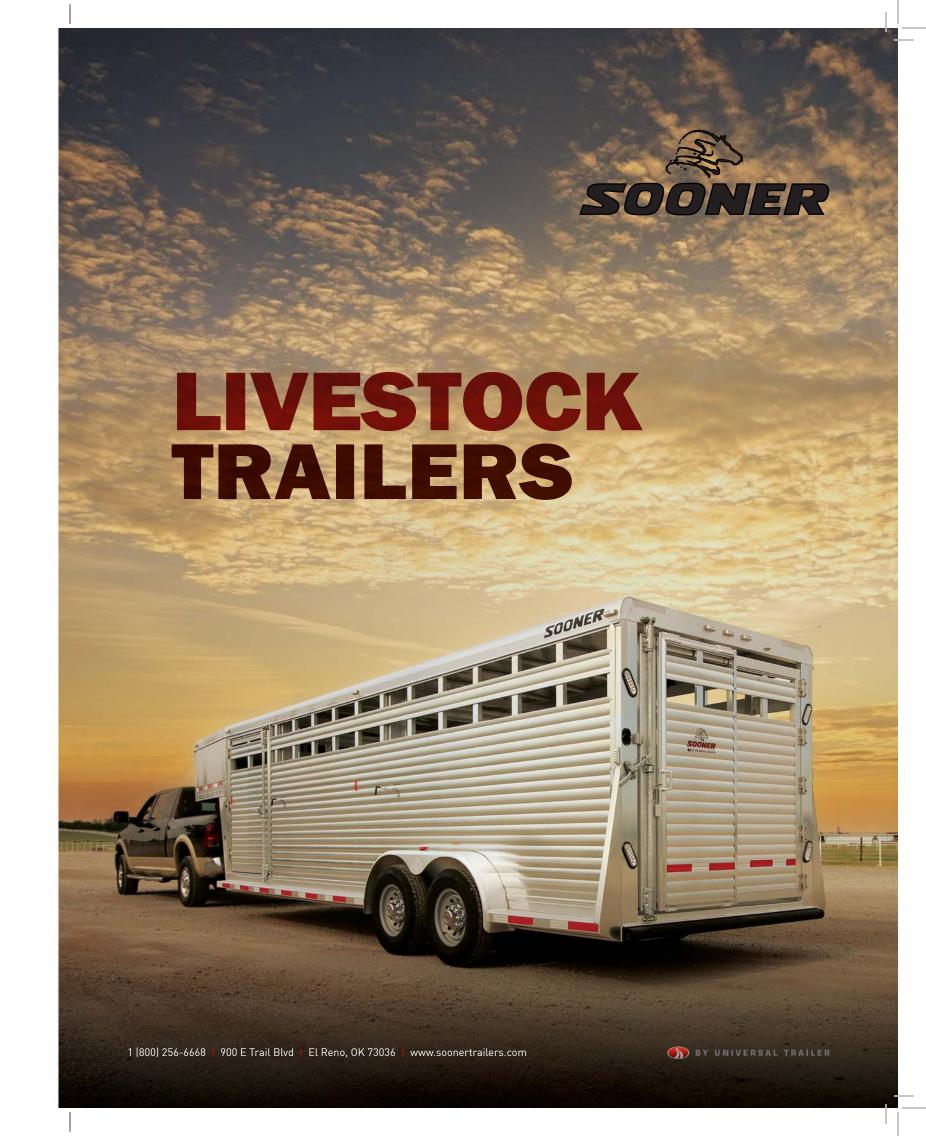

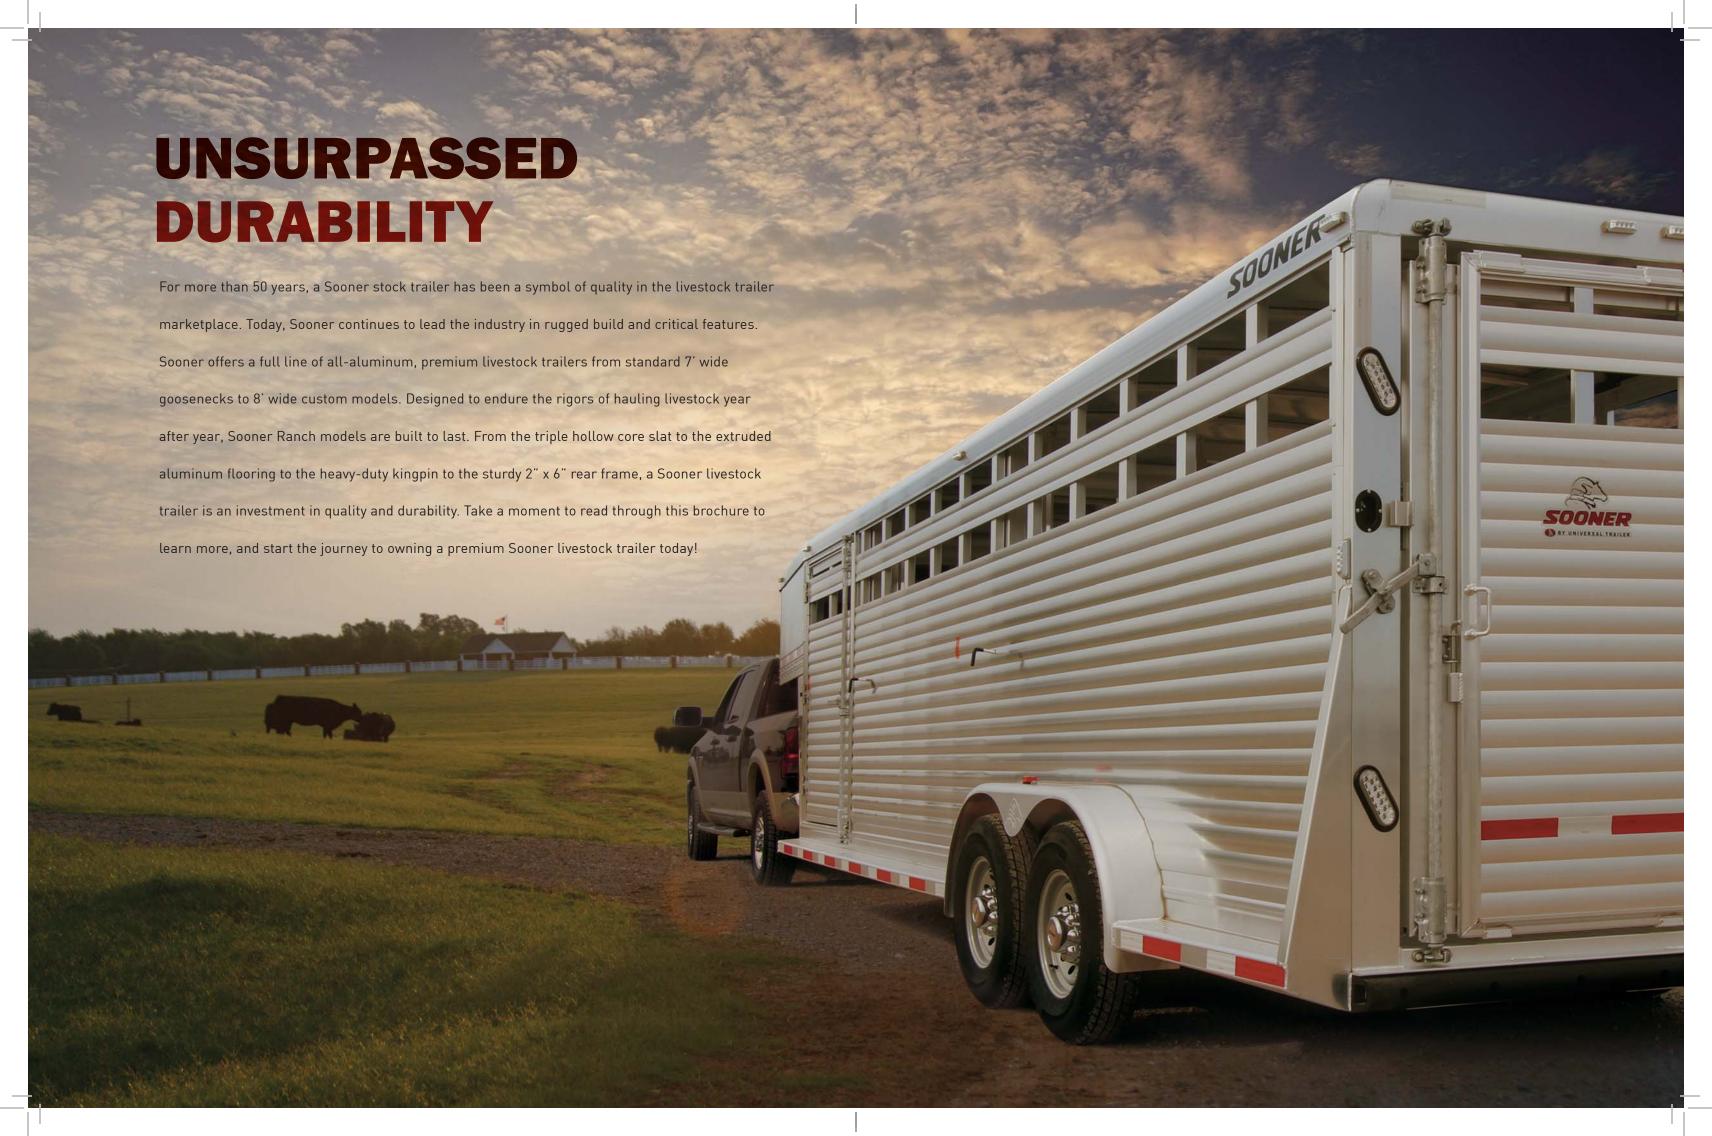

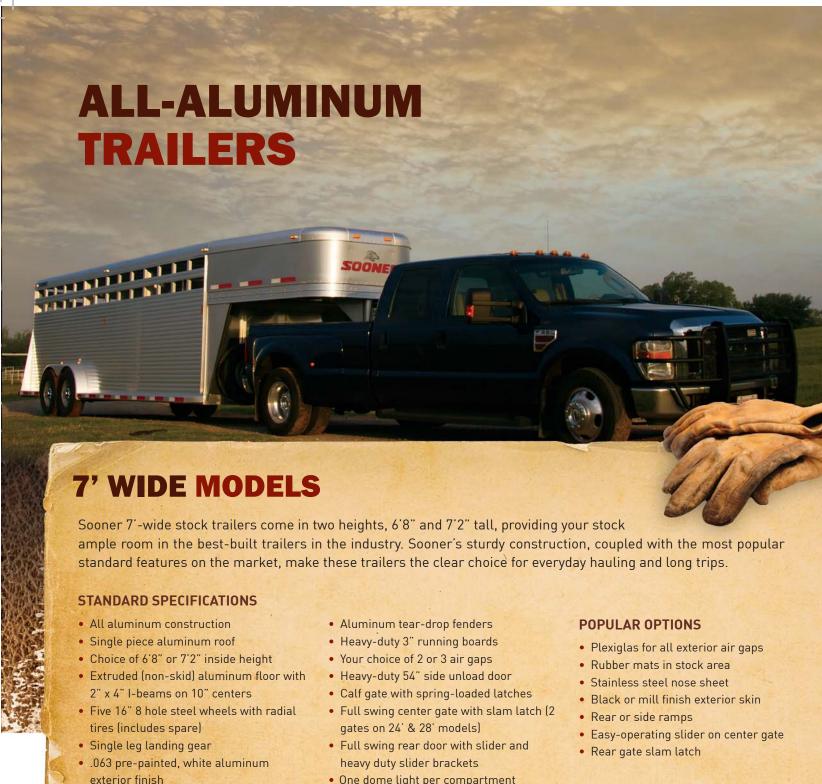

- One dome light per compartment
- Sooner exclusive, triple hollow core • 8 year warranty



*Phrase "all aluminum" denotes that both the skin and the frame of the trailer is constructed of aluminum. Trailers designated "all aluminum" have certain components not made of aluminum including steel axles, lighting and steel in the gooseneck (if the trailer has a gooseneck configuration)

aluminum sidewall extrusion

• 15/8" x 3" side posts

SR 7024 - Model shown

with natural aluminum side sheets (6'8" tall)

7'6" & 8' WIDE

STANDARD SPECIFICATIONS

- Available with 20' to 30' floor lengths
- Available with 7'6" or 8' exterior width
- Available with 6'8" or 7'2" interior height
- One piece aluminum roof
- 15/8" x 3" side posts

MODELS

SR 7630 - Model shown with natural aluminum side sheets (6'8" tall)

- Adjustable 2 5/16" gooseneck coupler
- Single drop leg jack
- 8' nose w/ 6' tapered .063 white skin
- Sooner exclusive, triple hollow core aluminum sidewall extrusion

- Aluminum tear drop fenders
- Full length, heavy-duty 3" running boards (7'6" wide models)
- Rear swing gate with sliding calf gate and heavy-duty galvanized pipe hardware
- Heavy duty drop down calf gate
- 54" side access door w/ pressure latch
- Center swing gate w/ slam latch and external release (2 on 24' and above)

POPULAR OPTIONS

- Black or mill finish exterior skin
- Air gap Plexiglas
- Drop wall vents
- Easy-operating slider on center gate
- Swinging center gate w/ calf gate
- Rear or side ramp
- Rear gate slam latch

For the most demanding ranchers across the country, Sooner makes top-quality 7'6" wide and 8'0" wide trailers that maximize space while proving exceptional safety features and a rugged build. Available in a variety of lengths, these trailers are ready for the road. And with Sooner's seemingly limitless supply of optional features, you can custom-order your new livestock trailer just the way you like it.








WE STAND BEHIND OUR TRAILERS! To demonstrate our confidence in our trailers, we offer one of the best warranties in the business! Now, all Sooner trailers come standard with a fully transferrable, eight-year limited warranty. See your local authorized Sooner dealership for details.



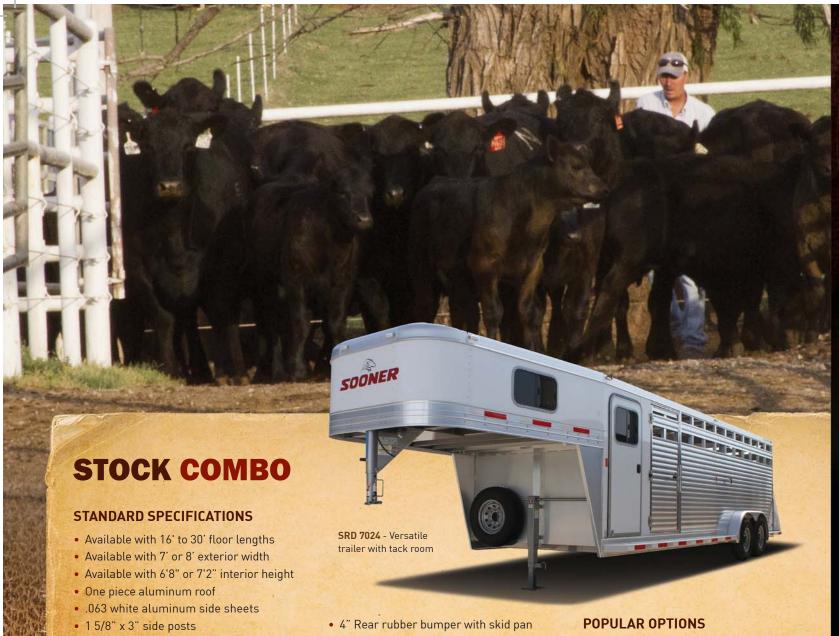

- Aluminum interlocking floor (non-skid)
- Two 7,000 lb axles on 20' and 24' models
- Five 8-hole, 16" steel modular wheels
- Two dome lights with external switch
- 37" side access door with pressure latch • Center swing gate with slam latch and
- Tack room w/ 4' sidewall

external release

- One camper door w/ window and screen
- One dome light w/ wall switch

- White or black exterior skin
- Stainless steel nose sheet
- Air gap Plexiglas
- Floor mats Aluminum wheels
- Windows in gooseneck nose
- Swinging center gate w/ calf gate
- Rear or side ramp
- Saddle rack, halter hooks, brush tray and blanket bar

Sooner stock combo trailers combine extraordinary hauling ability with the convenience of a tack room for storage and added functionality. Horse and livestock owners will benefit from the versatility and flexibility these trailers offer, combining the rugged build of a Sooner stock trailer with the perks of a fine Sooner horse trailer.



Single drop leg jack

Break away brake w/ battery and box

• Sooner exclusive triple hollow core

• Heavy-duty, 3" thick running boards

aluminum side panels with 2 or 3 air gaps

• Rear swing gate with sliding calf gate and

• 6" rear posts with heavy duty rear gussets

heavy-duty galvanized pipe hardware

Spare tire with exterior mount

Aluminum tear drop fenders



2" x 6" Rear Post with



Heavy-Duty, Non-Slip Standard LED Lights Extruded Aluminum Floor




Triple Hollow Core Bridle/Halter Hooks



4 Tier Saddle Rack (Optional)

SPECIFICATIONS

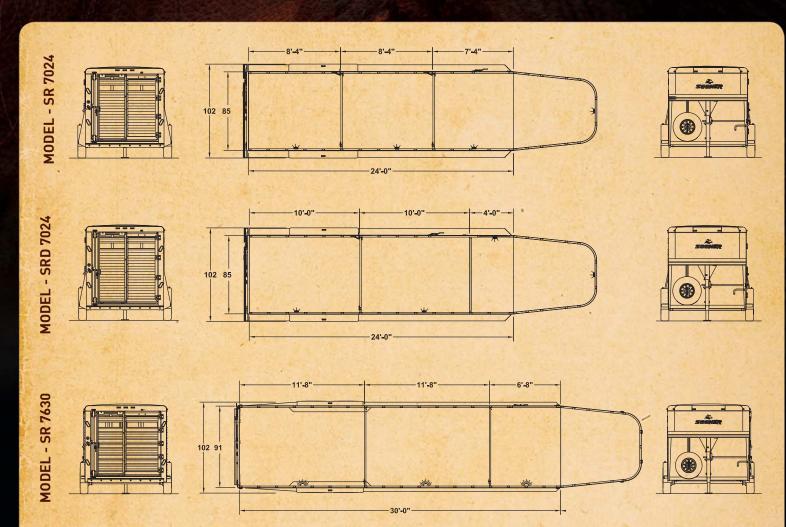

Trailer Model	Belly Length	Interior Height	Outside Width	Tack Room	Center Gates	Calf Gate	GVWR	Empty Weight	Wheel Size	Tire Specs	Axle Size
SR 7020	20'	6'8" or 7'2"	7	N/A	One	STD	14,000	4,420	16" Steel	10 Ply	(2) 7,000
SR 7024	24'	6'8" or 7'2"	7'	N/A	Two	STD	14,000	5,020	16" Steel	10 Ply	(2) 7,000
SR 7028	28'	6'8" or 7'2"	7'	N/A	Two	STD	16,000	5,500	16" Steel	14 Ply	(2) 8,000
SR 7630 DL	30.	6'8" or 7'2"	7.6"	N/A	Two	STD	16,000	5,930	17.5" Steel	16 Ply	(2) 8,000
ST 7630 TR	30.	6'8" or 7'2"	7'6"	N/A	Two	STD	21,000	5,930	16" Steel	14 Ply	(3) 7,000
SR 8020	20'	6'8" or 7'2"	8.	N/A	One	STD	14,000	5,200	16" Steel	10 Ply	(2) 7,000
SR 8024	24'	6'8" or 7'2"	8.	N/A	Two	STD	14,000	5,800	16" Steel	10 Ply	(2) 7,000
SR 8028	28'	6'8" or 7'2"	8.	N/A	Two	STD	16,000	6,300	16" Steel	14 Ply	(2) 8,000
SRD 7020	20'	6'8" or 7'2"	7'	4'	One	N/A	14,000	4,730	16" Steel	10 Ply	(2) 7,000
SRD 7024	24'	6'8" or 7'2"	7'	4	One	N/A	14,000	5,220	16" Steel	10 Ply	(2) 7,000
SRD 8020	20'	6'8" or 7'2"	8'	4'	One	N/A	14,000	5,400	16" Steel	10 Ply	(2) 7,000
SRD 8024	24'	6'8" or 7'2"	8'	4'	One	N/A	14,000	6,000	16" Steel	10 Ply	(2) 7,000
SRD 8028	28'	6'8" or 7'2"	8.	4'	Two	N/A	14,000	6,500	16" Steel	14 Ply	(2) 8,000

In keeping with its policy of continuous improvement, Exiss reserves the right to make specification changes at any time without notice or obligation. All weights and dimensions listed in this brochure are approximate. Illustrations may include optional equipment.